

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
13 March 2003 (13.03.2003)

PCT

(10) International Publication Number  
**WO 03/021965 A1**

(51) International Patent Classification<sup>7</sup>: **H04N 7/24, 7/52**

(21) International Application Number: **PCT/JP02/08780**

(22) International Filing Date: **30 August 2002 (30.08.2002)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
2001-265908      3 September 2001 (03.09.2001)    **JP**

(71) Applicant (for all designated States except US): **MAT-SUSHITA ELECTRIC INDUSTRIAL CO., LTD.**  
[JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka  
571-8501 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **Ji, Ming** [CN/SG];


Block 10, Geylang East Avenue 2, #02-09, 389758 Singapore (SG). **SHEN, Sheng Mei** [SG/SG]; Block 20, Choa Chu Kang Street 64, #03-02 Windermere, 689093 Singapore (SG). **HUANG, Zhongyang** [CN/SG]; Block 8, Holland Avenue #20-30, 271008 Singapore (SG). **SENOH, Takanori** [JP/JP]; 1-24-8, Higashinakaburi, Hirakata-shi, Osaka 573-0093 (JP).

(74) Agents: **AOYAMA, Tamotsu** et al.; AOYAMA & PARTNERS, IMP Building, 3-7, Shiromi 1-chome, Chuo-ku, Osaka-shi, Osaka 540-0001 (JP).

(81) Designated States (national): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.**

[Continued on next page]

(54) Title: **APPARATUS OF A FLEXIBLE AND COMMON IPMP SYSTEM FOR MPEG-2 CONTENT DISTRIBUTION AND PROTECTION**

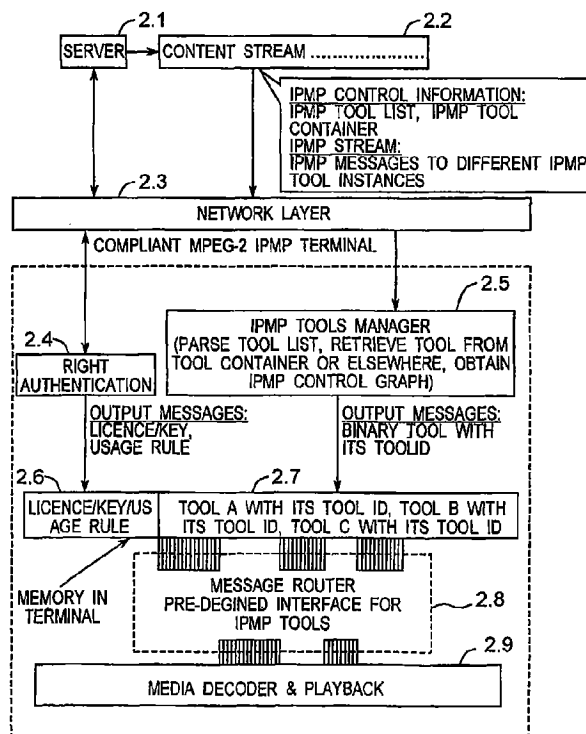

(57) Abstract: An apparatus of a flexible and common MPEG-2 IPMP system (Intellectual Property Management and Protection) is invented to provide flexibility and interoperability by introducing a IPMP Control Information which includes IPMP Tool List and an optional Tool Container. The IPMP Control Information is put in PSI in MPEG-2 transport stream, and a special PES packet in MPEG-2 program stream. IPMP Stream is defined to carry IPMP information that is to be sent to each individual IPMP tool instance. The concept of Tool Manager, Message Router from MPEG-4 IPMP extension is mapped into MPEG-2 terminal to form MPEG-2 IPMP framework together with introduced IPMP Control Information and IPMP Stream. As a result of this invention, the same protected MPEG-2 content is able to play back by different types of MPEG-2 IPMP terminals, and the same MPEG-2 content can be protected by using different vendors' IPMP system.



**(84) Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

## DESCRIPTION

APPARATUS OF A FLEXIBLE AND COMMON IPMP SYSTEM  
FOR MPEG-2 CONTENT DISTRIBUTION AND PROTECTION

5

## Technical Field

The present invention relates to content distribution and protection in MPEG-2 scope, especially to such applications where the protected content based on MPEG-2 is consumed by different IPMP terminal, and the same content is protected by different IPMP system.

10

## Background Art

Content distribution is becoming more and more demanding as multimedia data and contents can reach anywhere and anytime. Users are happy with the convenience and flexibility, and they can enjoy entertainment easily and efficiently. On the other hand, content owners are worried about the illegal usage of their property. There is a balance between two sides.

15

There are a lot of protection techniques for protecting the content, such as data encryption, watermarking, etc. They have been implemented in many content distribution applications. It seems different system employs different kinds of mechanisms and protection techniques to distribute content with protection. All the terminals or content consuming devices in that case are only able to play and consume the content that is provided by the same content provider. They cannot exchange their terminal or device to playback different contents.

20

25

In MPEG-4 context, a standardisation group has been working on MPEG-4 IPMP Extension. The solution is able to achieve

30

both of the following:

1. Allow the same protected content to be consumed on different vendors' MPEG-4 IPMP Terminals. This will be fully enabled.

2. Allow the same content to be protected by different vendors' IPMP Tools. This will be assisted to as large extent as possible.

In MPEG-2 context, there is a CA (Conditional Access) system that defines a minimum set of common CA elements necessary to achieve interoperability between different CA systems. However, there is no real inter-operability here, as not enough components are defined, and the architecture offered by CA is not flexible enough.

It is very difficult to produce the same terminal to play different MPEG-2 contents provided by different content providers in such case. In other words the same protected MPEG-2 content cannot be played back in different CA system.

On the other hand, CA system defines a common scrambling algorithm, this makes hardware implementation simple, however, this makes the whole architecture too rigid. IPMP tool should not be fixed to certain tool beforehand, it should allow more flexibility for vendors to choose their favourite tool in their IPMP system. In such case it is necessary to define some standard way and interface to provide both better flexibility and security at the same time.

Hence, a flexible and interoperable IPMP system is needed in MPEG-2 system for content protection.

To define a flexible and interoperable IPMP system structure for MPEG-2 to allow:

1. The same protected MPEG-2 content to be consumed on different vendors' MPEG-2 IPMP Terminals. This will be fully enabled.

2. The same MPEG-2 content to be protected by different

vendors' IPMP Tools. This will be assisted to as large extent as possible.

To provide the standard way for IPMP system implementers to build the whole IPMP system for MPEG-2 from encoder, channel  
5 distribution, to terminal in a secure manner;

#### Disclosure of Invention

To solve the problem, MPEG-4 IPMP Extension can be mapped to MPEG-2 with some modifications.

10 IPMP Control Information needs to put inside the content to describe what are the IPMP tools needed to play the content, and how they protect the content. It includes IPMP Tool List and IPMP Tool Container.

The IPMP Tool List supports indication of independent or  
15 alternative Tools. For each tool in the IPMP Tool List, the following information is provided:

1. IPMP Tool Identifier: A given IPMP tool is identified to other entities via its IPMP Tool Identifier, and an optional Parametric Description;

20 2. Possible alternatives to a given Tool; and

3. Optional Tool List Signature.

The IPMP Tool Container carries the binary tool itself in the content. One implementation of a given tool is carried as the payload of one IPMP Tool Container, the representation format,  
25 packaging information and IPMP Tool ID of which is specified in the container also.

IPMP Control Graph describes the association between different elementary streams under different programs and different IPMP tools, at the control point at which the IPMP tool should be  
30 running.

The IPMP Tool Manager is a conceptual entity in a given IPMP Terminal. Upon receipt of the Tool List, the Terminal should route the same to the IPMP Tool Manager for parsing and Tool retrieval. The Tool Manager also processes parametric descriptions, resolves alternative tools, and receives binary Tools that arrive in the Content.

All IPMP Tool Messages are routed through the Terminal. To represent this function, an entity called the Message Router (MR) is defined in the architecture. The MR connects and communicates with supported IPMP Tool(s). It thus abstracts the physical interface of one IPMP Tool from any other IPMP Tool that wishes to communicate with it. Message Routing is assumed to be instantaneous.

#### <Operation of Invention>

On the content provider side, a media content is encoded using existing coding technology like MPEG-2 or MPEG-4, and encrypted using existing IPMP tool like DES or AES. The content maybe embedded with watermarks using a Watermark Tool AAA (for example) before the encoding. The media content is then multiplexed using MPEG2 system.

At the same time, IPMP Control Information needs to be built up, that includes IPMP Tool List and an optional Tool Container. The IPMP Control Information is put in PSI in MPEG-2 transport stream, and a special PES packet in MPEG-2 program stream.

IPMP Tool List is also generated based on the IPMP Tools used in protecting the content. The IPMP Tools List includes IPMP Tool ID specifying a unique tool. It can also includes optional parametric description to allow the terminal to choose their own preferred tool that does the same function (for example, DES), and it may also includes a set of alternative tools so that the terminal

can choose among a set of known tools that can accomplish the same task.

IPMP Control Graph is also built during content generation. For example, if DES tool is used to encrypt video elementary stream 0x01 after encoding, then, in the control graph, there needs to be an indication that DES tool is used to protect elementary stream 0x01, and it should be called at which control point (before decoding). If Watermark Tool AAA is used to insert watermark into audio elementary stream 0x02 before encoding, then, in the control graph, there needs to be an indication that Watermark Tool AAA needs to be called upon elementary stream 0x02 at which control point (after decoding).

On the terminal side, IPMP Tools List is passed to the IPMP Tool Manager module sitting inside MPEG-2 terminal. The Tool Manager checks whether all tools needed to consume the content are present in the terminal, if there is one missing, the terminal follows a proprietary way to retrieve the missing IPMP Tool according to the IPMP Tool ID or parametric description. The obtained IPMP Tools are now available in the terminal, and they are stored in the IPMP terminal to be ready for use with the pre-defined messaging interface.

The IPMP Control Graph is also parsed by the terminal, so that the terminal knows which IPMP Tool to invoke upon which elementary stream at which control point.

The content stream is then continuing to pass through content decoder, necessary IPMP tools are called upon, and the content can be decoded and played back to the terminal.

<Effective of Invention>

This invention solves the problem to play back the same

protected MPEG-2 content by different types of terminals, as well as to protect the same MPEG-2 content using different vendors' IPMP system, by introducing the MPEG-2 IPMP framework.

5 IPMP Control Information can be carried in PSI for MPEG-2 transport stream, or in PES packet for MPEG-2 program stream. The IPMP Control Information carries IPMP Tool List, or IPMP Tool Container in the form of five new descriptors.

10 The IPMP Tool List identifies, and enables selection of, the IPMP Tools required to process the Content. IPMP Control Graph indicates the association between IPMP tools and their protection scope (control point). Tool Container carries the binary tool in the content stream.

15 IPMP Stream is the elementary stream within MPEG-2 system, to carry IPMP messages to each individual IPMP tool instances.

IPMP Tool Manager and Message Router can be mapped from MPEG-4 IPMP Extension to MPEG-2 IPMP system.

#### Brief Description of Drawings

20 Figure 1 shows Content Distribution and Protection in different CA System for MPEG-2 as the prior art.

Figure 2 shows General Diagram for a Compliant MPEG-2 IPMP System.

25 Figure 3 shows a Diagram of MPEG-2 IPMP Terminal, in which "DB" denotes a decoder buffer and "RB" denotes a render buffer.

#### Best Mode for Carrying Out the Invention

30 Existing CA system in MPEG-2 does not provide an interoperable and flexible content protection mechanism for both the content owners and terminal vendors.

The Figure 1 shows the prior art for the current typical CA system.

Content Owner in unit 1.0 provides contents through different content providers X, Y, and Z in unit 1.1, 1.4, and 1.7.  
5 Different CA system is used to protect the content for different content provider as shown in unit 1.2, 1.5, 1.8.

Therefore Content Decoding or Content Consumption terminal is also different from each other, as shown in unit 1.3, 1.6, and 1.9.

10 It is clear that MPEG-2 content protected by CA system A can't be played out on terminals that support CA system B, also there is no complete specification on how different CA systems from different vendors are to protect the same content, and how the terminal gets to know that.

15 In this invention, we define a MPEG-2 IPMP system,

1) to carry IPMP Control Information including Tool List and Tool Container in the stream to indicate which IPMP Tools is used by content providers and content distributors, and how binary tool should be carried inside the content.

20 2) to define 5 new descriptors in MPEG-2 system to hold Tool List, IPMP Control Graph, IPMP Tool Container.

3) to define 2 new streams. IPMP Stream to carry IPMP information that is to be sent to each individual tool instance, and IPMP Control Information Stream to carry IPMP Control Information in  
25 Transport Stream.

4) to map the concept of Tool Manager, Message Router from MPEG-4 IPMP extension into MPEG-2 terminal.

The general diagram in Figure 2 is shown for our presented compliant MPEG-2 IPMP system.

30 Server is shown in module 2.1, it works as either

Content Provider or Content distributor, or both functions for different application scenario.

Network layer is shown in module 2.3 for communication between Compliant MPEG-2 IPMP terminal and Server including  
5 transmission of content stream from the server to the terminal.

At first, Right Authentication in module 2.4 starts to interact with the server, to obtain the content access and consumption right, as well as the detail usage rule. If the right for content access is authorized in Module 2.4, the server will send  
10 the requested content stream to the terminal via the Network layer.

In module 2.2, Content stream is transmitted together with IPMP Control Information including Tool List and Tool Container, and IPMP Stream. The details of IPMP Control Information and IPMP Stream will be explained later.

15 IPMP Tools Manager shown in Module 2.5 is to parse/interpret IPMP Control Information. It parses the Tool List and finds out what are the IPMP tools needed to process the content. If there is any missing tool, the Tool Manager either retrieves the tool from the Tool Container or it retrieves the tool from somewhere  
20 else through a proprietary way. The Tool Manager is also responsible to select tool from a list of alternative choices, or to interpret the parametric description and choose its own favourite tool.

IPMP Tool Manager also parses the IPMP Control Graph to  
25 find out which tool is used upon which elementary stream at which control point. Details of this will be explained later.

The Licence/key, and Usage Rules are stored in the memory of the terminal as module 2.6 for further process. The binary IPMP Tools with their corresponding ToolIDs are stored in the memory  
30 of the terminal as module 2.7. Each of the Tools is built following

the generic and standardised Interface and it is pre-compiled using the compiler for matching the platform. For example, the Tool of Data encryption and decryption can be built based on one generic and specified Interface. It can be pre-compiled into Java Byte Code (JBC) for all the platforms/terminals with Java Virtual Machine, and it is also can be pre-compiled into Dynamic Link Library (DLL) for Windows based platforms/terminals.

Module 2.8 shows the Messaging Interfaces of IPMP Tools that are needed to be pre-defined for IPMP Tool providers and Terminal implementers to follow.

The detail explanation is split into four parts here, to indicate each invented item.

#### (1. IPMP Control Information)

IPMP Control Information needs to be carried in the content stream. IPMP Control Information contains necessary information like Tool List and Tool Container. The IPMP Tool List identifies, and enables selection of, the IPMP Tools required to process the Content. Tool Container enables the carriage of binary tool in content streams.

In short, the IPMP Control Information describes what are the IPMP tools needed to play the content, and how they protect the content. In Transport stream, it exists in the form of IPMP Control Information table. In Program Stream, it exists in the form of a PES packet when the stream\_id is IPMP Control Information Stream ID.

#### (1.1 IPMP Control Info Table in Transport Stream)

An additional table "IPMP Control Information Table" should be included in PSI (Program Specific Information). This is

used to hold IPMP control information including Tool Container and IPMP Tool List Descriptor that will be defined later on. The PID assignment is illustrated as below.

Table 1 -- Program specific information

Structure Name	Stream Type	Reserved PID #	Description
Program Association Table	ITU-T Rec. H222.0 ISO/IEC 13818-1	0x00	Associates Program Number and Program Map Table PID
Program Map Table	ITU-T Rec. H222.0 ISO/IEC 13818-1	Assigned in the PAT	Specifies PID values for components of one or more programs
Network Information Table	Private	Assigned in the PAT	Physical network parameters such as FDM frequencies, Transponder Numbers, etc.
IPMP Control Information Table	ITU-T Rec. H222.0 ISO/IEC 13818-1	0x03	Contains IPMP Tool List to describe the IPMP tools and how they protect the content.
Conditional Access Table	ITU-T Rec. H222.0 ISO/IEC 13818-1	0x01	Associates one or more (private) EMM streams each with a unique PID value

5

(1.1.1 Mapping of IPMP Control Information table into sections)

The IPMP Control Information table may be segmented into one or more sections, before insertion into Transport Stream packets, with the following syntax.

10

Table 2-IPMP Control Information Table section

Syntax	No. of bits	Mnemonic
IPMP_Control_Info_section() {		
table_id	8	uimsbf
section_syntax_indicator	1	bslbf
'0'	1	bslbf
reserved	2	bslbf
section_length	12	uimsbf
reserved	2	bslbf
ipmp_control_info_version	5	uimsbf
current_next_indicator	1	bslbf
section_number	8	uimsbf
last_section_number	8	uimsbf
descriptor_length	24	uimsbf
for (i=0; i<N;i++) {		
descriptor()		
}		
isSigned	1	bslbf
reserved	7	bslbf
if (isSigned)		
Signature	8	ByteArray
NumCerts	8	uimsbf
for (i=0; i<numCerts;i++) {		
CertType	8	uimsbf
Certificate	8	ByteArray
}		
Verifying_Tool_ID	128	uimsbf
}		
CRC_32	32	rpchbf
}		

(Semantic definition of fields in IPMP Control Information Table section)

5      table\_id -- This is an 8 bit field, which shall be always set to 0x02 as shown in table 1 above.

    section\_syntax\_indicator -- The section\_syntax\_indicator is a 1 bit field which shall be set to '1'.

    section\_length -- This is a 20 bit field. It specifies the

number of bytes of the section starting immediately following the section\_length field, and including the CRC. The value in this field shall not exceed 1048573. The length is set to be a large value, because the following descriptors may contain  
5 Tool\_Container\_Descriptor that will be described later.

ipmp\_control\_info\_version -- This 5 bit field is the version number of the whole IPMP Control Information Table. The version number shall be incremented by 1 modulo 32 when a change in the information carried within the ipmp control info table occurs. When  
10 the current\_next\_indicator is set to '1', then the version\_number shall be that of the currently applicable IPMP Control Information Table. When the current\_next\_indicator is set to '0', then the version\_number shall be that of the next applicable IPMP Control Information Table.

15 current\_next\_indicator -- A 1 bit indicator, which when set to '1' indicates that the IPMP Control Information Table sent is currently applicable. When the bit is set to '0', it indicates that the IPMP Control Information Table sent is not yet applicable and shall be the next IPMP Control Information Table to become valid.

20 section\_number -- This 8 bit field gives the number of this section. The section\_number of the first section in the IPMP Control Information Table shall be 0x00. It shall be incremented by 1 modulo 256 with each additional section in the IPMP Control Information Table.

25 last\_section\_number -- This 8 bit field specifies the number of the last section (that is, the section with the highest section\_number) of the IPMP Control Information Table.

descriptor\_length - This 16 bit field specifies the total length of the descriptors immediately following this field.  
30 ToolList\_Descriptor should be following this field. Details of the

descriptors are given in section 3.

isSigned - This 1 bit field indicates the presence of a signature in the IPMP Control Information table.

5       Signature - The signature of the entire IPMP Control Information including Tool List descriptor and Tool Container descriptor.

      CertType - The type of certification mechanism being used.

      NumCerts - The number of certificates included.

      Certificate -- The array of certificates.

10       Verifying\_Tool\_Id - The ID of the Tool that is required to verify the certificate(s). This may be the ID of the Terminal.

      CRC\_32 -- This is a 32 bit field that contains the CRC value that gives a zero output of the registers in the decoder defined in Annex B in [1] after processing the entire IPMP section.

15

#### (1.2 IPMP Control Information in Program Stream)

      IPMP Control Info provides overall IPMP Information including Tool List Descriptor in Program Stream. It is presented as a PES packet when the stream\_id value is specified value.

20

Table 3-IPMP Control Information

Syntax	No. of bits	Mnemonic
IPMP_control_info() {		
packet_start_code_prefix	24	bslbf
map_stream_id	8	uimsbf
ipmp_control_info_length	19	uimsbf
current_next_indicator	1	bslbf
ipmp_control_info_version	5	uimsbf
reserved	7	bslbf
marker_bit	16	bslbf
descriptor_length	16	uimsbf
for (i=0; i<N;i++) {		
descriptor()		
}		
isSigned	1	bslbf
reserved	7	bslbf
if (isSigned)		
Signature	8	ByteArray
NumCerts	8	uimsbf
for (i=0; i<numCerts;i++) {		
CertType	8	uimsbf
Certificate	8	ByteArray
}		
Verifying_Tool_ID	128	uimsbf
}		
CRC_32	32	rpchof
}		

(Semantic Definition of fields in IPMP Control Info)

packet\_start\_code\_prefix -- The packet\_start\_code\_prefix is a 24-bit code. Together with the map\_stream\_id that follows it constitutes a packet start code that identifies the beginning of a packet. The packet\_start\_code\_prefix is the bit string '0000 0000 0000 0000 0000 0001' (0x000001 in hexadecimal)

map\_stream\_id -- This is an 8 bit field whose value is always 0x?? in hexadecimal.

ipmp\_control\_info\_version -- This 5 bit field is the version

number of the whole IPMP Control Information. The version number shall be incremented by 1 modulo 32 when a change in the information carried within the ipmp control info occurs. When the current\_next\_indicator is set to '1', then the version\_number shall  
5 be that of the currently applicable IPMP Control Information. When the current\_next\_indicator is set to '0', then the version\_number shall be that of the next applicable IPMP Control Information.

ipmp\_control\_info\_length -- The ipmp\_control\_info\_length is a 19 bit field indicating the total number of bytes in the  
10 ipmp\_control\_info immediately following this field. The maximum value of the field is 524288 (bytes).

current\_next\_indicator -- A 1 bit field, which when set to '1' indicates that the IPMP Control Info sent is currently applicable. When the bit is set to '0', it indicates that the IPMP Control Info  
15 sent is not yet applicable and shall be the next one to become valid.

ipmp\_control\_info\_version -- This 5 bit field is the version number of the whole IPMP Control Info. The version number shall be incremented by 1 modulo 32 whenever the definition of the IPMP Control Info changes. When the current\_next\_indicator is set to '1',  
20 then the ipmp\_control\_info\_version shall be that of the currently applicable IPMP Control Info. When the current\_next\_indicator is set to '0', then the ipmp\_control\_info\_version shall be that of the next applicable IPMP Control Info.

descriptor\_length -- The descriptor\_length is a 16 bit field  
25 indicating the total length of the descriptors immediately following this field. ToolList\_Descriptor should be following this field. Details of the descriptors are given in section 3.

marker\_bit -- A marker\_bit is a 1 bit field that has the value  
'1'.

30 isSigned - This 1 bit field indicates the presence of a

signature in the IPMP Control Information table. The following fields in the if bracket bears the same semantics as in the last section.

5 (2. New Descriptors)

Program and program element descriptors are structures which may be used to extend the definitions of programs and program elements. All descriptors have a format which begins with an 8 bit tag value. The tag value is followed by an 8 bit descriptor length and data fields. The invention defines new IPMP Tool List Descriptor to hold the IPMP tool list, IPMP Control Graph Descriptor to represent the overall IPMP structure, and IPMP Tool Container Descriptor to carry binary IPMP tool inside the content.

15 The following semantics apply to both descriptors defined in this invention as well as the existing descriptors in MPEG-2.

descriptor\_tag -- The descriptor\_tag is an 8 bit field which identifies each descriptor. Its meaning is given in the following table. An 'X' in the TS or PS columns indicates the applicability of the descriptor to either the Transport Stream or Program Stream respectively. Five new descriptors are introduced in this invention.

Table 4 -- Program and program element descriptors

descriptor_tag	TS	PS	Identification
0	n/a	n/a	Reserved
1	n/a	n/a	Reserved
2	X	X	video_stream_descriptor
3	X	X	audio_stream_descriptor
4	X	X	hierarchy_descriptor
...	..	..	...
19	X	X	IPMP Tool List Descriptor
20	X	X	IPMP Tool Information Descriptor
21	X	X	IPMP Parametric Descriptor
22	X	X	IPMP Tool Container Descriptor
23	X	X	IPMP Descriptor
24-63	n/a	n/a	ITU-T Rec. H.222.0   ISO/IEC 13818-1 Reserved
64-255	n/a	n/a	User Private

descriptor\_length -- The descriptor\_length is an 8 bit field specifying the number of bytes of the descriptor immediately following descriptor\_length field.

5

#### (2.1 IPMP Tool List Descriptor)

The IPMP Tool List Descriptor includes a list of IPMP tools. It is used to specify all IPMP tools that should be used in order to play back the content.

10

Table 5 - IPMP Tool List descriptor

Syntax	No. of bits	Mnemonic
IPMPToolList descriptor() {		
descriptor_tag	8	uimsbf
descriptor_length	16	uimsbf
numTools	8	uimsbf
for ( i=0; i<numTools; i++) {		
Ipmptool_Descriptor()		
}		
}		

Ipmptool\_Descriptor() is defined in the following section.

## (2.2 IPMP Tool Descriptor)

5           IPMP\_Tool\_Descriptor contains information for a logical IPMP Tool required by the Terminal. The logical tool may be one of the following:

1. A vendor-specific IPMP Tool specified by IPMP\_ToolID,
2. One of a list of alternate IPMP Tools,
- 10       3. An IPMP Tool specified by a parametric description.

Table 6 - IPMP Tool Info descriptor

Syntax	No. of bits	Mnemonic
IPMPTool_descriptor() {		
descriptor_tag	8	uimsbf
descriptor_length	16	uimsbf
isAltGroup	1	uimsbf
isParametric	1	uimsbf
Reserved (0b111111)	6	uimsbf
IPMP_Tool_ID	128	uimsbf
if (isAltGroup) {		
numAlternatives	8	uimsbf
for (i=0; i< numAlternatives;i++) {		
Alt_IPMP_Tool_ID	128	uimsbf
}		
}		
else if ( isParametric ) {		
parametricDescription		ByteArray
}		
}		

(Semantic definition of fields in IPMP Tool descriptor)

In the case of a list of alternate tools, the Terminal shall select an IPMP Tool from the list of alternate IPMP Tools. In the case of a parametric description of the IPMP Tool, the Terminal shall select an IPMP Tool that meets the criteria specified in the parametric description.

IPMP\_ToolID - the identifier of the logical IPMP Tool required by the Terminal.

isAltGroup - IPMP\_Tool contains a list of alternate IPMP Tools. In this case, IPMP\_ToolID is an identifier for the list of alternate IPMP Tools, and the Terminal shall route information specified in the bitstream for IPMP\_ToolID to the specific IPMP Tool instantiated by the Terminal.

numAlternates - the number of alternate IPMP Tools specified

in IPMP\_Tool[].

Alt\_IPMP\_ToolIDs - an array of the IDs of alternate IPMP Tools that can allow consumption of the content.

5 isParametric - IPMP\_Tool contains a parametric description of an IPMP Tool. In this case, IPMP\_ToolID is an identifier for the parametrically described IPMP Tool, and the Terminal shall route information specified in the bitstream for IPMP\_ToolID to the specific IPMP Tool instantiated by the terminal.

10 (2.3 IPMP Tool Container Descriptor)

There are many cases whereby content itself carried the binary IPMP tool (light weighted). The terminal may retrieve the IPMP tool from the content, load it, instantiate it and immediately use it in order to play out the content.

15 In MPEG-4 IPMP extension, binary IPMP tools are carried in tool ES. However, in MPEG-2 context, it could be easier to carry the binary IPMP tool inside a newly defined IPMP Tool Container Descriptor. One implementation of a given tool is carried as the payload of one IPMP Tool Container, the representation format,  
20 packaging information and IPMP Tool ID of which is also specified in the container.

Table 7 – IPMP Tool Container descriptor

Syntax	No. of bits	Mnemonic
IPMPToolContainer_descriptor() {		
descriptor_tag	8	uimsbf
descriptor_length	16	uimsbf
IPMP_Tool_ID	128	uimsbf
Tool_Format_ID	32	uimsbf
Tool_Package_ID	16	uimsbf
sizeofTool	16	uimsbf
for ( i=0; i<sizeofTool; i++) {		
Toolbody	8	uimsbf
}		
}		

(Semantic definitions of fields in IPMP Tool Container Descriptor)

IPMP\_Tool\_ID - the ID of the Tool carried in this stream.

Tool\_Format\_ID - This is defined as 0x0001 for a structurally  
 5 described tool. Otherwise, the Tool\_Format\_ID indicates the Binary  
 Representation of the Tool and is ned by a registration authority.

Note: A structurally described tool implies a description of  
 the IPMP Tool in terms of a network of primitives that can be  
 combined to provide some or all IPMP functionalities required for  
 10 content consumption. For example, a DES decryption algorithm could  
 be described as a sequence of opcodes calls receiving the ciphertext  
 as input and providing the plaintext as output.

Tool\_Package\_Id indicates the details of the package of  
 the Tool - examples are CAB or a Winzip self-install executable.  
 15 Values are assigned by a registration authority.

#### (2.4 IPMP Control Graph Descriptor)

IPMP Control Graph descriptor contains description of  
 the entire IPMP protection scheme. It associates IPMP tool with each

individual stream under its protection.

Table 8 - IPMP Control Graph descriptor

Syntax	No. of bits	Mnemonic
IPMPControlGraph_descriptor(){		
descriptor_tag	8	uimsbf
descriptor_length	8	uimsbf
numProtectedPrograms	8	uimsbf
if ( numProtectedPrograms>0 ) {		
program_number	16	uimsbf
numProtectedStreams	8	uimsbf
for ( i=0; i<numStreams; i++) {		
stream_type	8	uimsbf
reserved	3	uimsbf
elementary_PID	13	uimsbf
ipmp_length	16	uimsbf
for ( i=0; i< N; i++) {		
IPMP_Descriptor		
}		
}		
}		
else if (numProtectedPrograms==0) {		
numProtectedStreams	8	uimsbf
for ( i=0;		
i<numProtectedStreams; i++) {		
stream_type	8	uimsbf
elementary_stream_id	8	uimsbf
ipmp_length	16	uimsbf
for ( i=0; i< N; i++) {		
IPMP_Descriptor		
}		
}		
}		
}		

(Semantic Definition of fields in IPMP Control Graph Descriptor)

- 5 numProtectedPrograms - This 8 bit fields indicates how many programs are under IPMP protection scope. If the number is 0, it means it is a program stream. If it is greater than 0, it means it is a transport stream, and a for loop follows to trace into each

program.

Transport Stream Case (numProtectedPrograms > 0):

5        program\_number -- Program\_number is a 16 bit field. It specifies the program that is under protection by IPMP. This field shall not take any single value more than once within one version of the IPMP Control Information.

10        ipmp\_length -- This is a 16 bit field. It specifies the number of bytes of the IPMP descriptors immediately following the ipmp\_length field.

      NumProtectedStreams - Specifies number of elementary streams (belonging to the above program) that are under the protection by IPMP.

15        stream\_type -- This is an 8 bit field specifying the type of program element carried within the packets with the PID whose value is specified by the elementary\_PID. The values of stream\_type are specified in table 11 described later.

20        elementary\_PID -- This is a 13 bit field specifying the PID of the Transport Stream packets which carry the associated program element. If there is a IPMP Descriptor following immediately after this elementary\_PID, it means that this particular elementary stream is under the protection scope defined by this IPMP Descriptor.

Program Stream Case (numProtectedPrograms == 0):

25        elementary\_stream\_id -- The elementary\_stream\_id is an 8 bit field indicating the value of the stream\_id field in the PES packet headers of PES packets in which this elementary stream is stored.

      IPMP Descriptor is further defined below.

## (2.5 IPMP Descriptor)

IPMP Descriptor specifies the IPMP protection at a particular scope. Including specification of control points, sequencing, IPMP tool IDs, etc.

Table 9 - IPMP Descriptor

Syntax	No. of bits	Mnemonic
IPMP_descriptor(){		
descriptor_tag	8	uimsbf
descriptor_length	8	uimsbf
IPMP_DescriptorID	8	uimsbf
IPMP_ToolID	128	uimsbf
numControlPoints	8	uimsbf
for ( i=0; i<numControlPoints;		
i++) {		
controlPoint	8	uimsbf
reserved	6	uimsbf
sequenceCode	2	uimsbf
if		
( sequenceCode==0x1 ) {		
IPMP_DescriptorID	8	uimsbf
controlPoint	8	uimsbf
}		
if		
( sequenceCode==0x2 ) {		
IPMP_DescriptorID	8	uimsbf
controlPoint	8	uimsbf
}		
OpaqueData		ByteArray
}		

5

## (Semantic Definitions of Fields in IPMP Descriptor)

IPMP\_DescriptorID - a unique ID of this IPMP descriptor. This could be used to refer to this particular descriptor (protection scope).

10 IPMP\_ToolID - Unique ID of the IPMP Tool that is protecting in this scope.

NumControlPoints - number of Control points at which the IPMP Tool is active.

controlPoint - value specifying the IPMP control point at which the IPMP Tool resides, and is one of the following values:

Control Point	Description
0x00	No control point.
0x01	Control Point between the decode buffer and the decoder.
0x02	Control Point between the decoder and the composition buffer.
0x03	Control Point between the composition buffer and the compositor.

5        sequenceCode - value specifying the relation of the IPMP Tool to IPMP Tool(s) residing at the same control point, and is one of the following. If the sequenceCode is either 0x01 or 0x02, a IPMP Descriptor ID together with a controlPoint follows immediately, to specify which tool (instance) is this current IPMP tool preceding or  
10        following.

Sequence Code	Description
0x00	IPMP Tool is not sequenced
0x01	IPMP Tool precedes another tool
0x02	IPMP Tool follows another tool
0x03	A logical "OR" of 0x01 and 0x02

OpaqueData -- opaque data to control the IPMP Tool.

(3 New Streams)

15        Stream\_id specifies the type and number of the elementary stream as defined by the table below. Stream\_id 1111 1001 is assigned to IPMP Stream in this embodiment.

Table 10 -- Stream\_id assignments

stream_id	stream coding
1011 1100	program_stream_map
1011 1101	private_stream_1
1011 1110	padding_stream
1011 1111	private_stream_2
110x xxxx	ISO/IEC 13818-3 or ISO/IEC 11172-3 audio stream number x xxxx
1110 xxxx	ITU-T Rec. H.262   ISO/IEC 13818-2 or ISO/IEC 11172-2 video stream number xxxx
1111 0000	ECM_stream
1111 0001	EMM_stream
1111 1001	ancillary_stream (IPMP Stream)
... ..	... ..
1111 1100 ... 1111 1110	reserved data stream
1111 1111	program_stream_directory

Table 11 -- Stream type assignments

Value	Description
0x00	ITU-T   ISO/IEC Reserved
0x01	ISO/IEC 11172 Video
0x02	ITU-T Rec. H.262   ISO/IEC 13818-2 Video or ISO/IEC 11172-2 constrained parameter video stream
0x03	ISO/IEC 11172 Audio
0x04	ISO/IEC 13818-3 Audio
...	...
0x0F	IPMP Stream
0x11-0x7F	ITU-T Rec. H.222.0   ISO/IEC 13818-1 Reserved
0x80-0xFF	User Private

## (3.1 IPMP Stream)

The IPMP Stream is a new elementary stream that is to carry IPMP information. Unlike MPEG-4 IPMP extension, where there can be many IPMP Elementary streams in one content, with each IPMP ES associated with one IPMP system, in MPEG-2, all IPMP information for all IPMP tools sitting on all control points are carried in a single IPMP Stream.

Hence, there is a need to indicate the clear destination in every piece of IPMP information in IPMP Stream.

It is defined in this invention that IPMP Stream should be a concatenation of IPMP info messages, with the syntax defined below:

Table 12 - IPMP Info Message

Syntax	No. of bits	Mnemonic
IPMP_info_message() {		
ipmp_descriptor_id	8	uimsbf
control_point	8	uimsbf
length_of_message	16	uimsbf
for ( i=0; i<N; i++) {		
message	8	uimsbf
}		
}		

The ipmp\_descriptor\_id and control\_point together clearly defines the destination of this IPMP\_info\_message. This message should be routed by the message router to the IPMP Tool defined in the corresponding ipmp descriptor sitting at the specified control\_point.

## (4 MPEG-2 IPMP Terminal)

IPMP Tool Manager and Message Router can be directly mapped from MPEG-4 IPMP Extension Terminal to MPEG-2 IPMP terminal.

Figure 3 shows the architecture of a MPEG-2 IPMP terminal.

#### (4.1 IPMP Tool Manager)

5           The IPMP Tool Manager is a conceptual entity in a given IPMP Terminal. Upon receipt of the Tool List, the Terminal should route the same to the IPMP Tool Manager for parsing and Tool retrieval. The Tool Manager also processes parametric descriptions, resolves alternative tools, and receives binary Tools that arrive in  
10       the Content.

          The following steps detail the process of parsing and retrieval of Tools in an MPEG-2 Terminal.

1. The IPMP Tool List Descriptor arrives in the IPMP Control Information Table in PSI and is routed to the Tool Manager.
- 15       2. The IPMP Tool Manager parses information for the IPMP Tools as per the syntax in clause 2.2.2.1.
3. The Tool Manager checks if the required Tools are available. For each unavailable Tool, an attempt to obtain the Tool may be made. How to obtain the missing tool is an implementation issue.
- 20       4. The IPMP Tool Manager is also responsible for parsing the IPMP Tool Container Descriptor and retrieving the binary IPMP Tool that is carried inside PSI.
5. The IPMP Tool Manager is further responsible for resolving parametric descriptions.

25

#### (4.2 IPMP Message Router)

          All IPMP Tool Messages are routed through the Terminal. To represent this function, an entity called the Message Router is defined in the architecture. The MR connects and communicates with  
30       supported IPMP Tool(s). It thus abstracts the physical interface of

one IPMP Tool from any other IPMP Tool that wishes to communicate with it. Message Routing is assumed to be instantaneous. In case of an MR error, an appropriate error status is returned by the MR. In all other cases, the MR is required to route, without a change in semantic meaning, information and responses as received.

Messaging interface can be mapped from MPEG-4 IPMP Extension without modification. However, there is no need to define a context ID for tool instances under MPEG-2. IPMP Descriptor ID together with control point should clearly define a specific tool instance running at a specific control point protecting a specific elementary stream.

#### (4.3 Mutual Authentication)

Tools that must communicate with one another or with the Terminal must do so in a way that meets the security requirements of the Tools and the Terminal. Tools must establish trust with the Terminal and possibly with one another to enable secure communication. Support for the establishment of a communication channel that reflects the nature of inter-tool trust can be accomplished via the use of secure, trusted authenticated channels.

Messages supporting the mutual authentication can be directly mapped from MPEG-4 IPMP extension to MPEG-2 framework.

Although the present invention has been described in connection with specified embodiments thereof, many other modifications, corrections and applications are apparent to those skilled in the art. Therefore, the present invention is not limited by the disclosure provided herein but limited only to the scope of the appended claims.

## CLAIMS

1. Apparatus of a flexible and common IPMP System for MPEG-  
2 content distribution and protection on content provider side,  
5 comprising:  
encoder that encodes a content using existing coding  
technology into a content stream;  
encrypter that encrypts the encoded content stream using  
at least one IPMP tool;  
10 section that creates IPMP Tool List of at least one IPMP  
tool used for encrypting the encoded content;  
section that creates IPMP Control Graph that indicates  
how the at least one IPMP tool protects the stream;  
section that multiplexes IPMP Control information  
15 including IPMP Tool List into IPMP Control Information Table for  
transport stream, or into IPMP Control Information PES packet for  
program stream; and  
section that multiplexes IPMP Control information table  
inn the case of the transport stream and IPMP control informaiton  
20 PES packet in the case of the program stream with the content stream  
using MPEG-2 system.
2. The apparatus according to claim 1, further comprising  
watermark section that embeds watermark information in the content  
25 using existing watermarking tool.
3. The apparatus according to claim 1, further comprising  
section that creates IPMP Tool Container to carry binary tools in  
the content stream.

4. The apparatus according to claim 1, further comprising:  
section that creates IPMP stream to carry time variant  
IPMP related information that is to be sent to each individual tool  
instance during content consumption at terminal side; and

5 section that multiplexes the IPMP stream into MPEG-2  
content stream.

5. Apparatus of a flexible and common IPMP system for MPEG-  
2 content distribution and protection on MPEG-2 IPMP terminal side,  
10 comprising:

de-multiplexer that de-multiplexes IPMP Control  
Information including IPMP Tool List from MPEG-2 content stream sent  
from a content provider;

section that interprets IPMP Tool List;

15 section that retrieves missing IPMP tool based on the  
IPMP Tool List from local (either pre-loaded or pre-coded),  
peripheral or remote side;

section that interprets IPMP Control Graph and  
obtaining information which tool controls which stream at which  
20 control point; and

section that interacts with at least one IPMP tool  
through pre-defined (messaging) interface at the control point.

6. The apparatus according to claim 5, further comprising  
25 section that performs at least one of watermark retrieving and  
watermark embedding, through pre-defined (messaging) interface at  
the control point.

7. The apparatus according to claim 6, further comprising  
30 section that interprets parametric description of IPMP Tool List and

alternative tools to make a tool selection based on the interpretation result.

8. The apparatus according to claim 5, further comprising  
5 section that interprets parametric description of IPMP Tool List and alternative tools to make a tool selection based on the interpretation result, and

section that retrieves binary IPMP Tools from IPMP Tool Container within IPMP Control Information to obtain the associated  
10 Tool ID, Tool Format ID and Tool Package ID of each IPMP Tool.

9. The apparatus according to claim 5, further comprising router that routs time variant IPMP related message to a specific IPMP Tool instance or the terminal itself.

15

10. The apparatus according to claim 5, further comprising section that implements some existing and commonly used IPMP tools in an embedded MPEG-2 IPMP terminal.

20 11. The apparatus according to claim 5, wherein the MPEG-2 content stream contains IPMP related streams including IPMP Control Information stream and IPMP stream, and the IPMP Control Information stream includes IPMP Tool List and IPMP Tool Container.

25 12. The apparatus according to claim 5, wherein MPEG-2 content streams are protected by IPMP tools, and contain information of IPMP tools such as Tool ID, Tool Location, Tool List and Tool Control Graph.

30 13. The apparatus according to claim 5, wherein MPEG-2

content streams are protected by IPMP tools, and some of the IPMP tools are carried in the content streams by a defined IPMP Tool container.

5 14. The apparatus according to claim 5, wherein MPEG-2 content streams are protected by a few IPMP tools, and some missing IPMP tools in the terminal can be retrieved from a specified location.

10 15. The apparatus according to claim 5, wherein MPEG-2 content streams are protected by a few IPMP tools, and the IPMP tools are pre-implemented in the terminal.

15 16. The apparatus according to claim 5, wherein a protected MPEG-2 stream is processed first by using IPMP information which is carried in the same MPEG-2 stream, such as IPMP Tool List, IPMP Control Graph, IPMP Tool Container, and IPMP stream.

20 17. The apparatus according to claim 5, wherein a protected MPEG-2 stream is processed first by interpreting IPMP Control Information which is carried in the same MPEG-2 stream, parsing IPMP Tool List, interpreting IPMP Control Graph, retrieving missing tools, applying associated IPMP tools to the audio and video streams at the defined control point.

25 18. The apparatus according to claim 5, wherein a protected MPEG-2 stream is processed first by a conceptual IPMP manager to obtain the necessary IPMP Tools and apply them to the associated audio and video streams.

1/3

Fig. 1

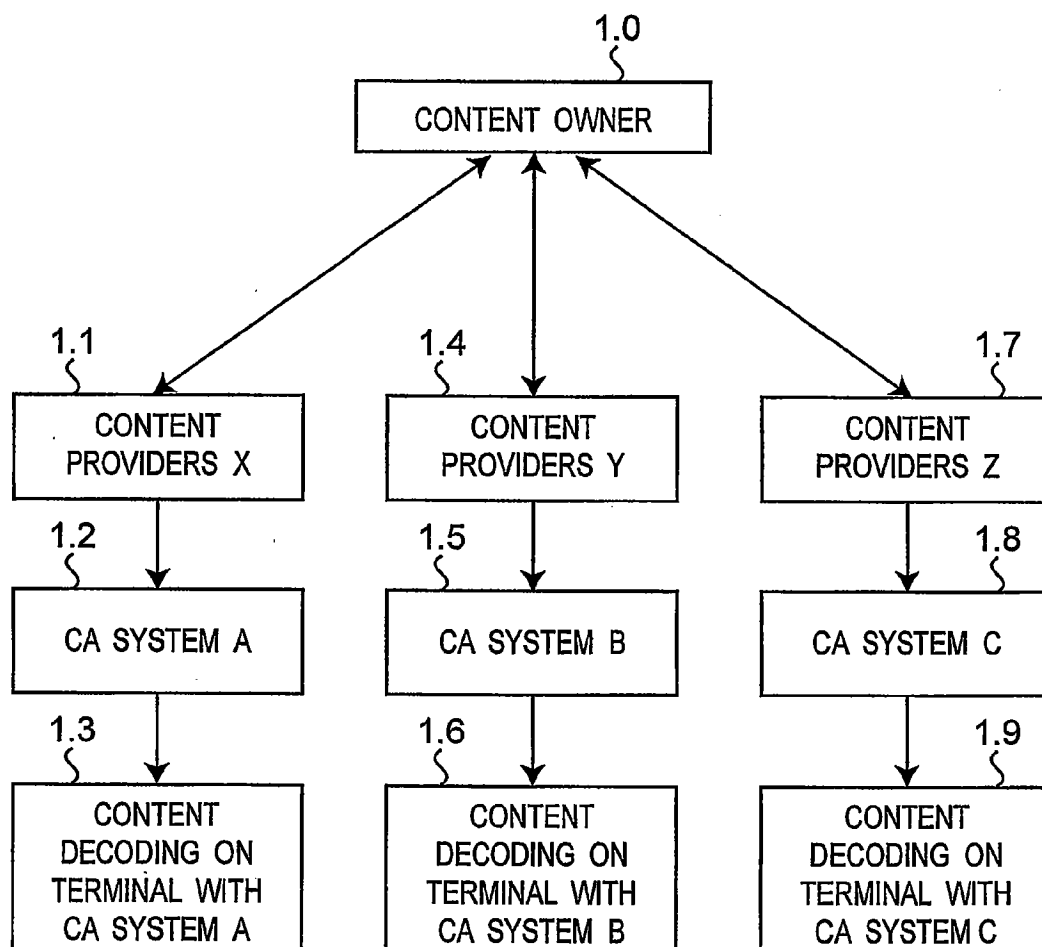


Fig. 2


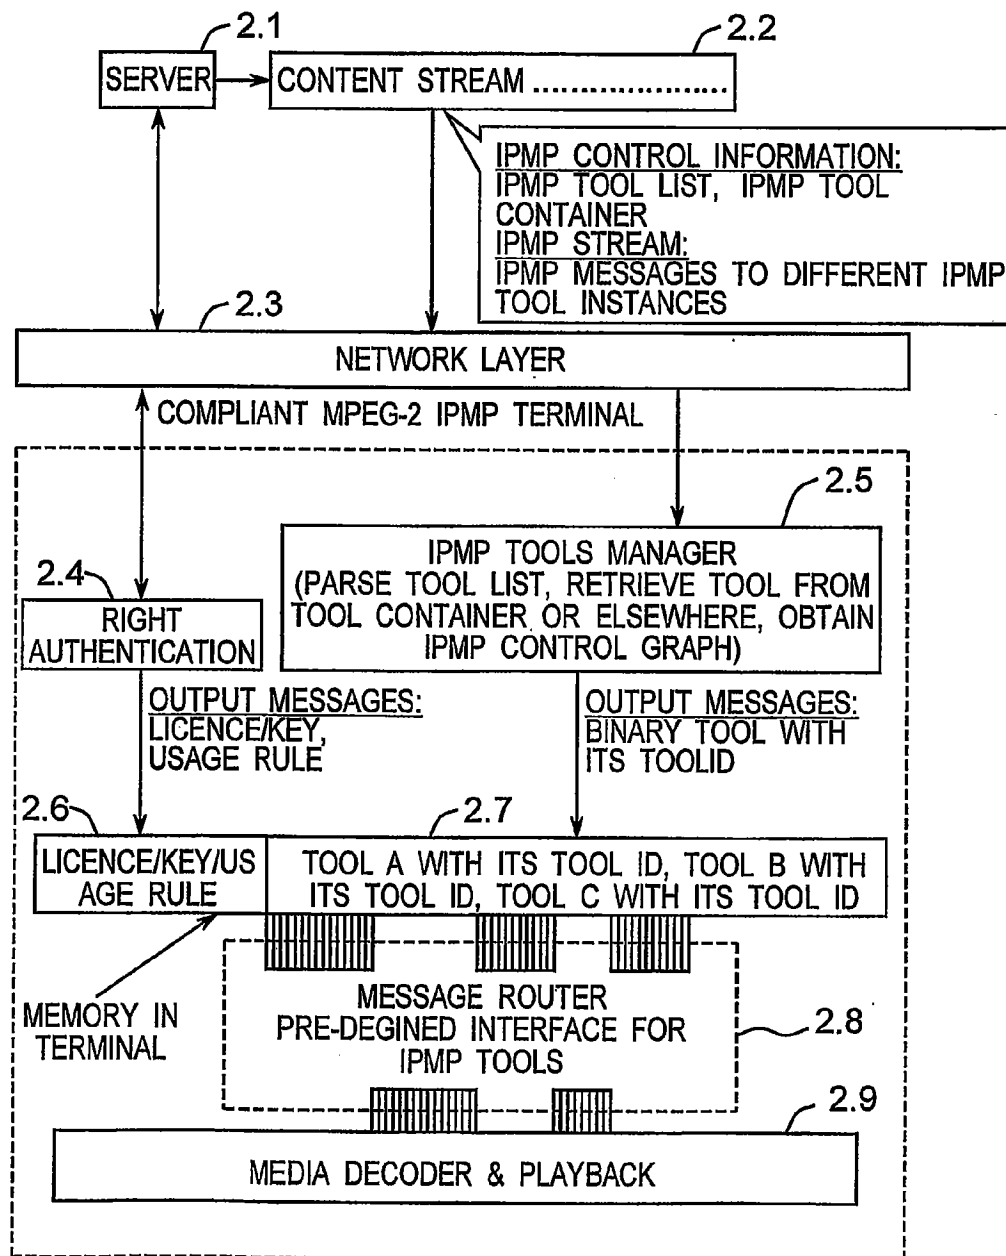


Fig.3

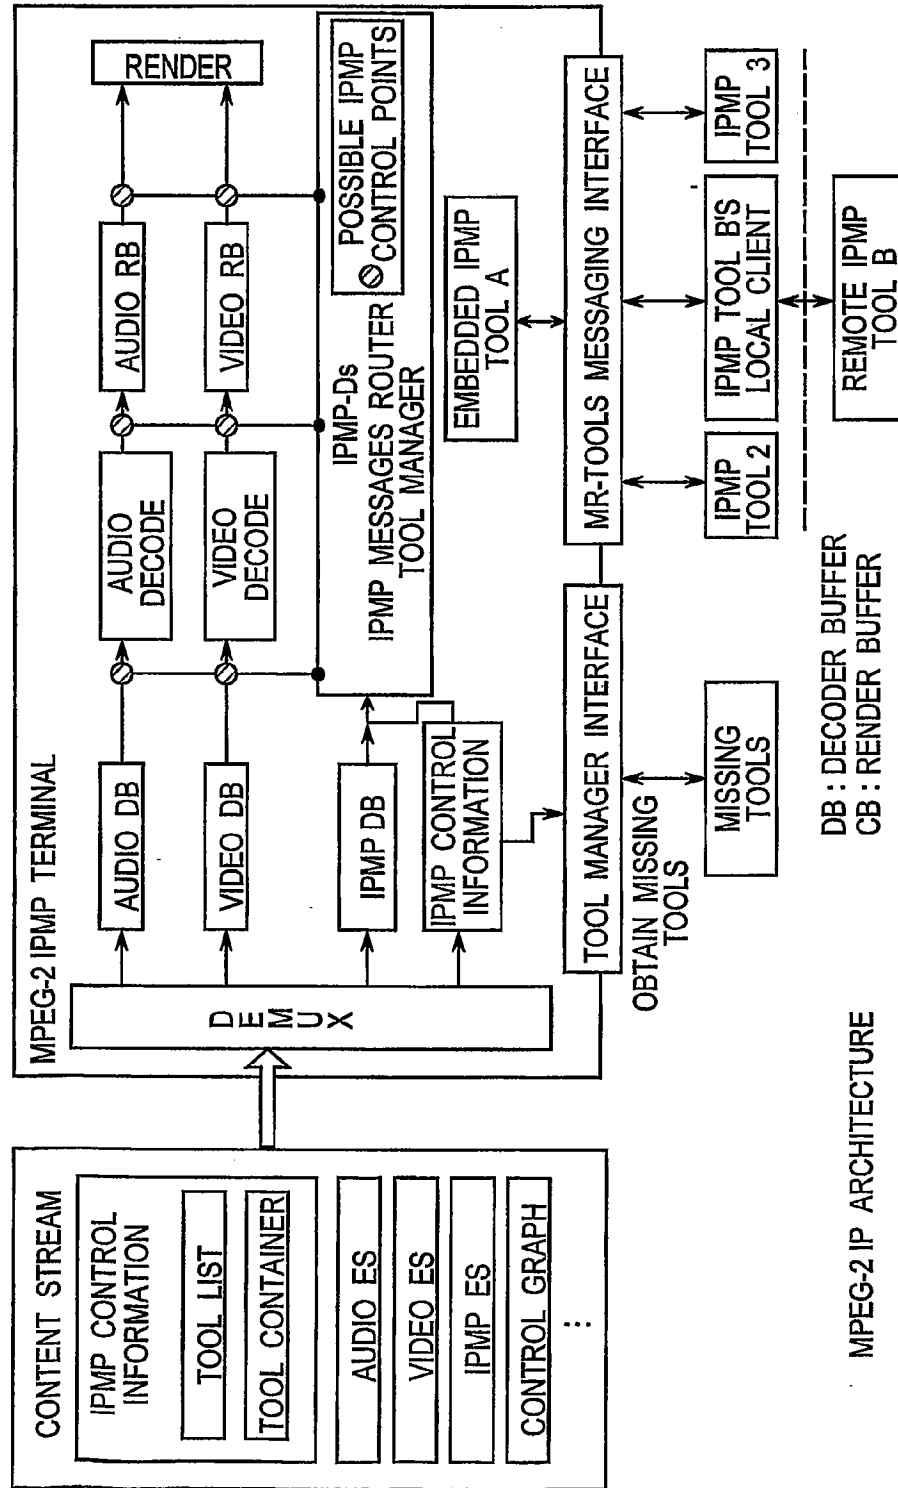

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP 02/08780

**A. CLASSIFICATION OF SUBJECT MATTER**  
 IPC 7 H04N7/24 H04N7/52

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>WO 99 48296 A (INTERTRUST TECHNOLOGIES CORP) 23 September 1999 (1999-09-23)            abstract            page 1, line 29 -page 2, line 9            page 4, line 6 -page 5, line 30            page 8, line 23 -page 9, line 12            page 12, line 21 -page 13, line 11            page 14, line 22 -page 14, line 26            page 17, line 3 -page 17, line 27            page 21, line 23 -page 21, line 28            page 23, line 13 -page 24, line 7            page 26, line 4 -page 27, line 26            ---            -/--</p>	1-18

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

20 January 2003

Date of mailing of the international search report

27/01/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Schoeyer, M

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP 02/08780

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>VAN RIJNSOEVER B J ET AL: "Interoperable content protection for digital TV" MULTIMEDIA AND EXPO, 2000. ICME 2000. 2000 IEEE INTERNATIONAL CONFERENCE ON NEW YORK, NY, USA 30 JULY-2 AUG. 2000, PISCATAWAY, NJ, USA, IEEE, US, 30 July 2000 (2000-07-30), pages 1407-1410, XP010512769 ISBN: 0-7803-6536-4 page 1407, right-hand column, paragraph 2. -page 1409, right-hand column, paragraph 4.2</p> <p>----</p>	1-18
X,P	<p>WO 01 91052 A (CANON KK ;TAKAKU MASAHIKO (JP)) 29 November 2001 (2001-11-29) abstract page 8, line 2 -page 10, line 16 page 16, line 1 -page 16, line 13 page 21, line 14 -page 22, line 8 page 28, line 13 -page 31, line 24 page 38, line 23 -page 40, line 4</p> <p>----</p>	1-18
A	<p>EP 1 079 627 A (CANON KK) 28 February 2001 (2001-02-28) abstract column 1, line 15 -column 2, line 51 column 21, line 52 -column 24, line 55</p> <p>----</p>	1-18
E	<p>WO 02 100037 A (KOGURE TAKUYO ;SENOH TAKANORI (JP); MATSUSHITA ELECTRIC IND CO LTD) 12 December 2002 (2002-12-12) abstract</p> <p>----</p>	1-18
E	<p>WO 02 071752 A (KOGURE TAKUYO ;SENOH TAKANORI (JP); MATSUSHITA ELECTRIC IND CO LTD) 12 September 2002 (2002-09-12) abstract</p> <p>-----</p>	1-18

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP 02/08780

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9948296	A	23-09-1999	CA 2323781 A1 CN 1301459 T EP 1062812 A1 JP 2002507868 T WO 9948296 A1	23-09-1999 27-06-2001 27-12-2000 12-03-2002 23-09-1999
WO 0191052	A	29-11-2001	AU 5883101 A WO 0191052 A2	03-12-2001 29-11-2001
EP 1079627	A	28-02-2001	JP 2001069457 A JP 2001078007 A JP 2001203683 A EP 1079627 A1	16-03-2001 23-03-2001 27-07-2001 28-02-2001
WO 02100037	A	12-12-2002	WO 02100037 A1	12-12-2002
WO 02071752	A	12-09-2002	JP 2002330126 A WO 02071752 A1	15-11-2002 12-09-2002